

Honeywell

E-Mon System-10 BTU Meter

SPECIFICATION DATA



DESCRIPTION

The System-10 BTU Meter provides highly accurate thermal energy measurement in chilled water, hot water and condenser water systems based on signal inputs from two matched temperature sensors (included) and any of insertion or inline flow meters (ordered separately). The basic model provides local indication of energy, flow, and temperature data through an alphanumeric display. An isolated solid state dry contact is provided for energy total. Optional analog outputs and network communications are also available..

Applications

Chilled water, hot water and condenser water systems for:

- Commercial office tenant billing
- Central plant monitoring
- University campus monitoring
- Institutional energy cost allocation
- Performance/efficiency evaluations
- Performance contracting energy monitoring

FEATURES

Simple Installation and Commissioning - Factory programmed and ready for use upon delivery. All process data and programming functions are accessible via front panel display and keypad.

Single Source Responsibility - One manufacturer is responsible for every aspect of the energy measurement process, ensuring component compatibility and overall system accuracy.

N.I.S.T. Traceable Calibration with Certifications - Each BTU measurement system is individually calibrated using application specific flow and temperature data and is provided with calibration certifications.

Precision Solid State Temperature Sensors - Custom calibrated and matched to an accuracy better than $\pm 0.15^\circ$ F over calibrated range.

Highly Accurate Flow Meters - Insertion turbine and inline turbine flow meters are accurate to within $\pm 0.5\%$ of rate at the calibrated typical flow rate and within $\pm 2\%$ of rate over and extended 50:1 turndown range (0.4 - 20 ft/s).

Complete Installation Package - All mechanical installation hardware, color coded interconnecting cabling and installation instructions are provided to ensure error-free installation and accurate system performance.

Serial Communications - Optional communications card provides complete energy flow and temperature data to the control system through a single network connection, reducing installation costs.

Ordering Information

The System-10 BTU Meter is sold complete with temperature sensors and standard thermowells. Flow Meters are purchased separately.



31-00182-01

Table 1. SYSTEM-10 Models

Item #	Description
SYSTEM-10	System-10 BTU Meter
SYSTEM-10-OPT1	Add for 6" and larger pipes
SYSTEM-10-OPT2	Add for 2.5" - 3" copper tube
SYSTEM-10-OPT3	Add for 4" copper tube
SYSTEM-10-OPT4	Upgrade to outdoor thermowells (pair)
SYSTEM-10-OPT5	Upgrade to hot tap thermowells (pair)
SYSTEM-10-OPT8	High temperature sensors (over 200° F)
SYSTEM-10-OPT9	Add one analog output
SYSTEM-10-OPT10	Add four analog outputs
SYSTEM-10-OPT11	Auxiliary pulse input
Choose from the following flow meters:	
F-1100/F-1200	Insertion Turbine Flow Meter (1¼"-72")
F-1300	Inline Turbine Flow Meter (¾" - 1")
F-2000	Series Full Bore Vortex Flow Meter
F-3000	Series Full Bore Electromagnetic Flow Meter
F-3500	Insertion Electromagnetic Flow Meter (3"-72")

Refer to catalog for flow meter installation kits.

Consult with Honeywell E-Mon for additional flow meter types.

SPECIFICATIONS

NOTE: Specifications are subject to change without notice.

Calibration:

Flow meter and temperature sensors are individually calibrated, followed by a complete system calibration. Field commissioning is also available.

Accuracy:

Differential temperature accuracy ±0.15° F over calibrated range

Computing nonlinearity within ±0.05%

Programming:

Factory programmed for specific applications
Field programmable via front panel interface

Memory:

Non-volatile EEPROM memory retains all program parameters and totalized values in the event of power loss.

Display:

Alphanumeric LCD displays total energy, total flow, energy rate, flow rate, supply temperature and return temperature.

Alpha: 16 character, 0.2" high; Numeric: 6 digit, 0.4" high

Output Signals:

Standard:

Isolated solid state dry contact for energy total

Contact rating: 100 mA, 50V

Contact duration: 0.5, 1, 2, or 6 sec

Optional:

Analog Output(s) (4-20 mA, 0-10 V or 0-5 V):

One or four analog output(s) available for flow rate, energy rate, supply/return temps, or delta-T.

Serial Communications: BACnet MS/TP, LONWORKS, JCI-N2 or Siemens P1. Contact factory for availability of additional communications protocols.

Liquid Flow Signal Input:

0-15 V pulse output from any flow meter.

Temperature Sensors:

Solid state sensors are custom calibrated using N.I.S.T. traceable temperature standards.

Current based signal (mA) is unaffected by wire length.

Temperature Range:

Liquid temperature range: 32° to 200° F

Optional liquid temperature range: 122° to 302° F

Ambient temperature range: 40° to 120° F

Mechanical:

Electronics Enclosure:

Standard: Steel NEMA 13, wall mount, 8"x10"x4"

Optional: NEMA 4 (not UL listed)

Approximate weight: 12 lbs.

Temperature Thermowells:

Standard: ½" NPT brass thermowells (length varies with pipe size) with junction box

Note: 6" pipes and larger require SS thermowell option

Optional:

- ½" NPT stainless steel thermowells
- Outdoor junction box with thermal isolation
- Hot tap thermowells with isolation valves are available in plated brass or stainless steel

Electrical:

Input Power*:

Standard: 24 VAC 50/60 Hz, 500 mA

Optional: 120 VAC 50/60 Hz, 200 mA

230 VAC, 50 Hz, 150mA

* Based on Btu meters configured for network connection without the optional analog outputs

Internal Supply:

Provides 24 VDC at 200 mA to electronics and flow meter

Wiring:

Temperature signals: Use 18 - 22 ga twisted shielded pair

flow signals: use 18 - 22 ga; see flow meter specification sheet for number of conductors

Typical SYSTEM-10 Installation

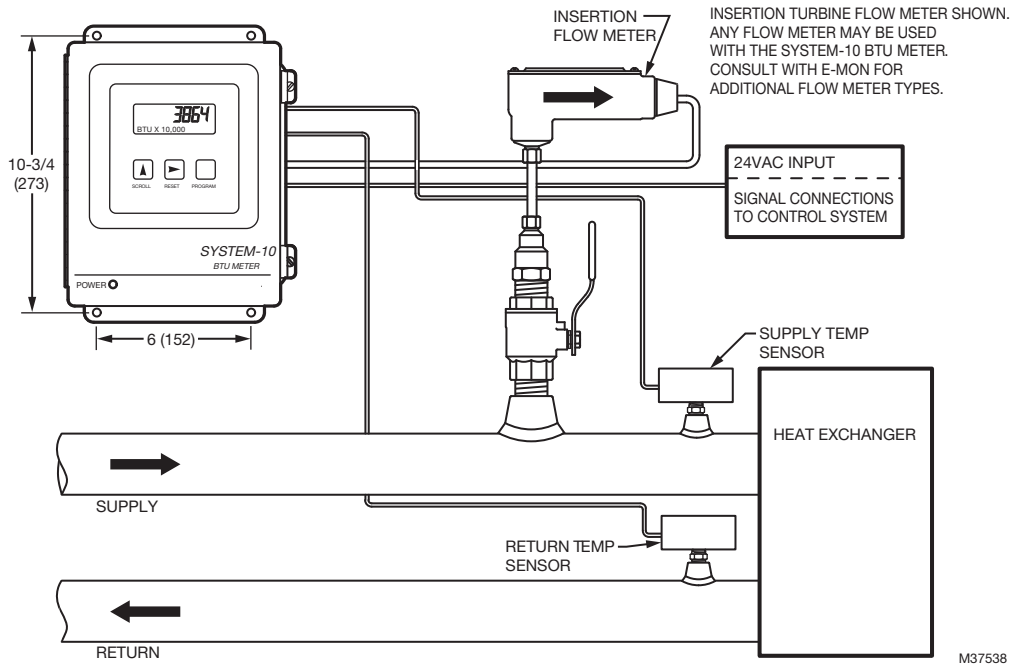


Fig. 1. Typical SYSTEM-10 installation.

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

Home and Building Technologies

In the U.S.:

Honeywell

715 Peachtree Street NE

Atlanta, GA 30308

customer.honeywell.com

® U.S. Registered Trademark
© 2018 Honeywell International Inc.
31-00182-01 M.S. 07-18
Printed in United States

Honeywell